

Features

- N-Female connector (50 Ω)
- 3 dBi max gain
- Frequency range: 698/960 – 1700/2700 MHz
- Includes mounting hardware
- Connects to booster with COAX-PL (sold separately)
- Low VSWR across bands
- Compact indoor design



Description

Designed to blend seamlessly into any environment, the 222W Antenna™ is a dome ceiling-mount antenna for in-building Public Safety signal boosters.

The wide band indoor antenna transmits and receives signal in a 360 degree pattern and is designed to cover 700Mhz and 800Mhz Public Safety Frequencies.

Install Guidelines

In addition to the antenna, mounting options are included for installations with or without a crawl space.

Be sure to deploy the antenna in an area central to your desired indoor signal coverage where there are minimal obstacles.

Ultimately, the in-building range of this antenna depends on three factors:


1. Physical obstructions
2. Power generated by booster
3. Signal level received by the outdoor antenna

Technical Specifications

Frequency(MHz)	698-960 / 1700 - 2700 MHz
Input Impedance	50 ohm
Antenna Gain	3 dBi
VSWR	≤ 2
Power Rating	10 W
Polarization Type	Vertical
Radiation	Omni-directional
Maximum Power	50 W
Connector Type	N-Female
Dimensions	3.5" Height x 7.25" Diameter
Color	White
Mount	Ceiling
Beamwidth	H:360° E:80° H:360° E:80° / H:360° E:45°
Ground Plane	Built-in

Installation (Crawl Space Accessible)

1. Drill a 35 mm diameter hole in the ceiling. The size should be large enough to allow the antenna's plastic cable base to pass through. The ceiling thickness should be no more than 20 mm.
2. Place antenna cable through hole.
3. From crawl space, screw the fixing nut onto antenna and fasten around the threaded plastic cable base.
4. Connect female antenna connector with COAX-PL cable that leads to the booster port marked INSIDE.

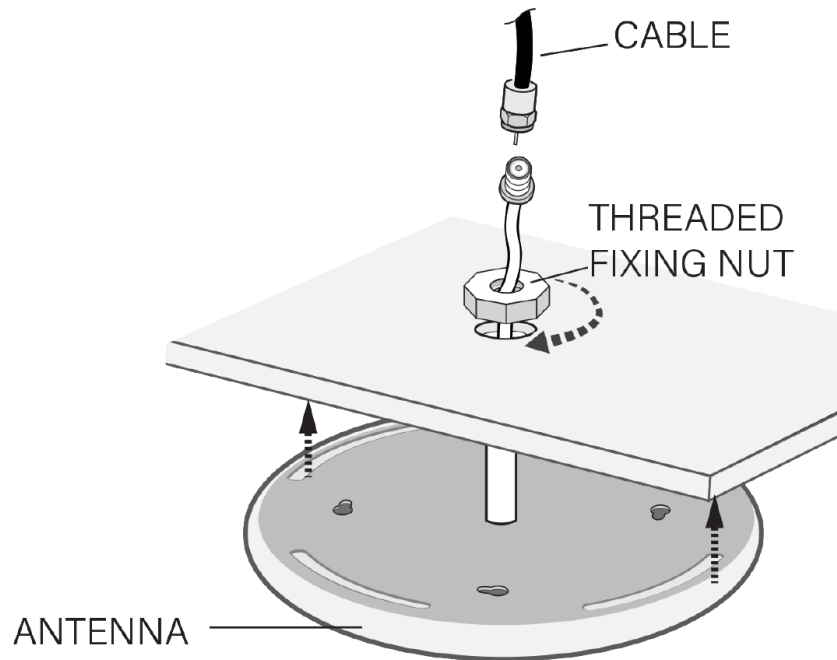

Ordering Information

Model	Description	Stock No.
222W	Wideband Indoor Omni Ceiling Mount Dome Antenna, 50 ohm, 3 dBi 698-960 / 1700 -2700 MHz	3996186