


- UHF Wideband Splitter (450-512 MHz)
- Low VSWR
- Low Insertion Loss
- For Indoor Applications (IP60 Rated)
- Multiple Output Port Configurations

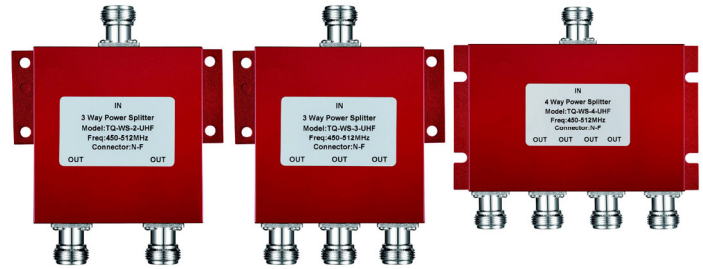

<i>Item</i>	SPLIT-UHF-2	SPLIT-UHF-3	SPLIT-UHF-4
<i>Frequency Range</i>	450 - 512 MHz		
<i>Insertion Loss</i>	≤0.5 dB	≤0.6 dB	≤0.6 dB
<i>VSWR</i>	≤1.25:1		
<i>Isolation</i>	20 dB	18 dB	17 dB
<i>Split Loss</i>	3.0 dB	4.8	6.0
<i>Maximum Power</i>	50 W		
<i>Dimensions (W x H x D)</i>	3.8 × 4.5 × 0.9 inch	3.8 × 4.5 × 0.9 inch	4.8 × 4.3 × 0.9 inch
<i>Weight</i>	.53 lb	.55 lb	.89 lb
<i>Impedance</i>	50 Ω		
<i>Connector Type</i>	N-Female		
<i>Color</i>	Red		
<i>Operating Temp.</i>	-30° to +70° C		

Model	Description	Stock No.
SPLIT-UHF-2	Wideband Splitter, 2-Way, 450-512MHz, 50W	3996161
SPLIT-UHF-3	Wideband Splitter, 3-Way, 450-512MHz, 50W	3996162
SPLIT-UHF-4	Wideband Splitter, 4-Way, 450-512MHz, 50W	3996163

[illegible]